


INSTALLATION MANUAL



Prepare the required components (C x1).  
First, remove the pre-installed K from component C, then insert C into D.  
Finally, secure C and D in place using K.

INSTALLATION MANUAL

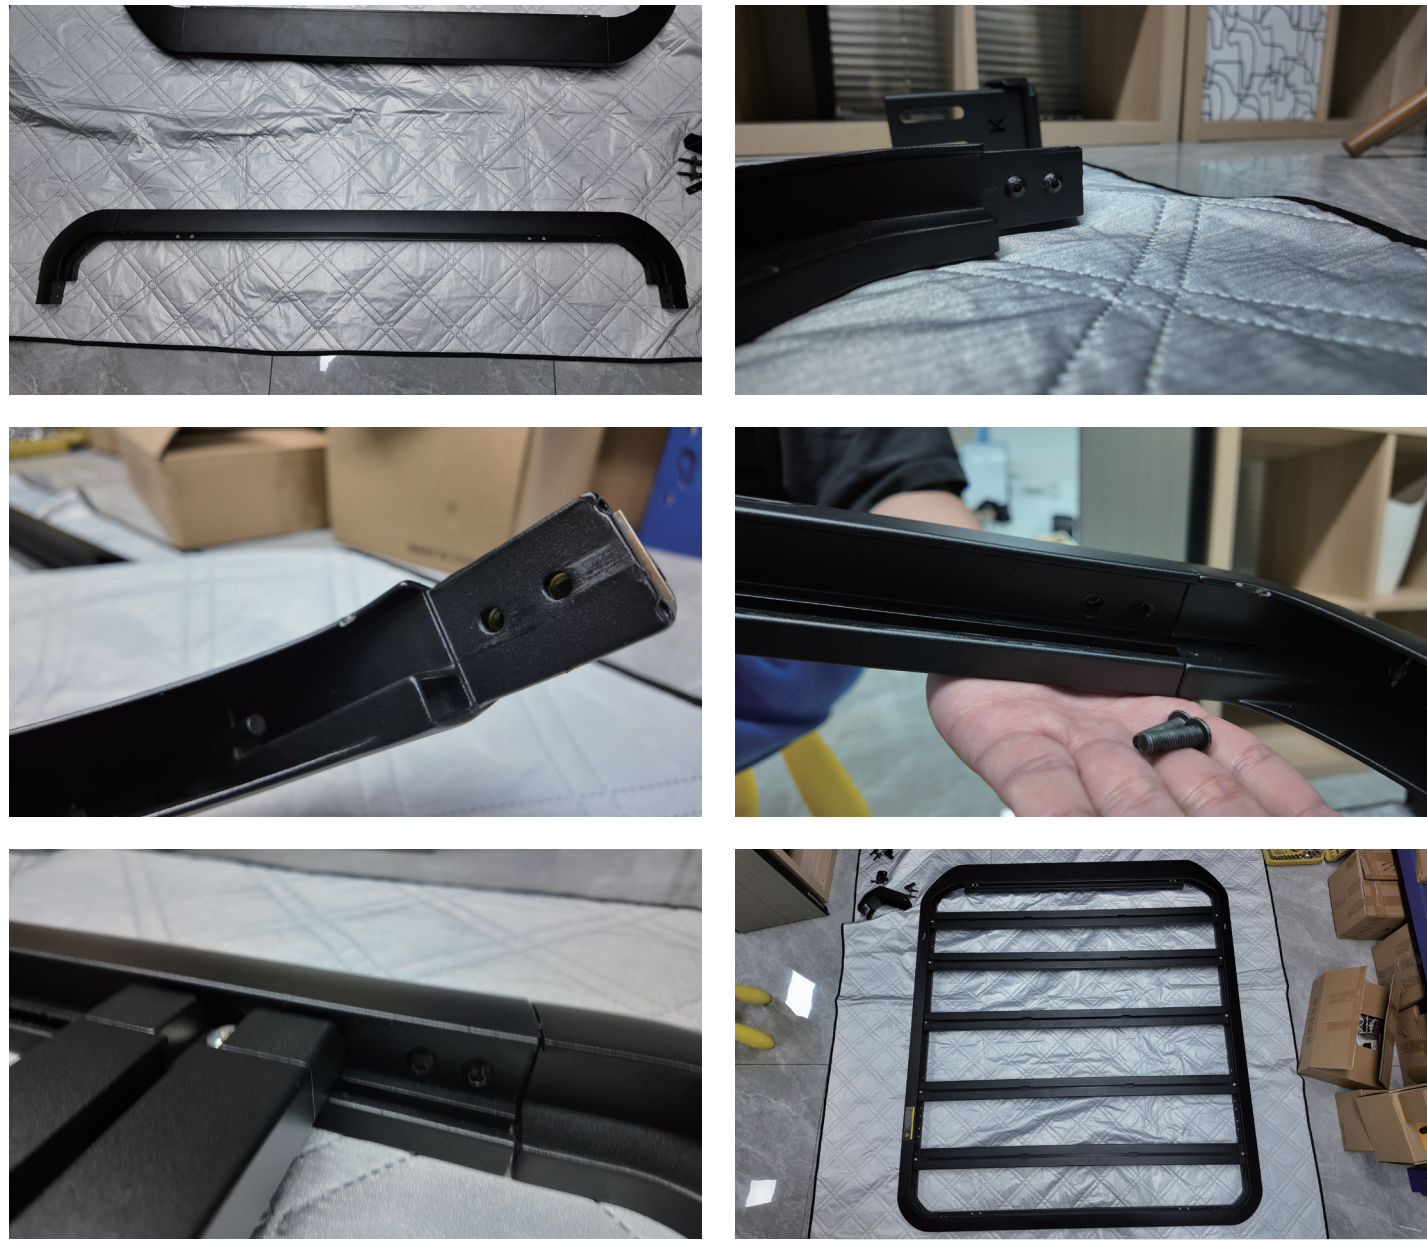


Prepare the required components (F x4, G x4, H x8, I x8).  
Lift the pre-assembled luggage frame onto the roof,  
Slide E to align with the mounting holes on the luggage frame,  
tighten with F, G, H and I, then fully tighten the base screws of E.

INSTALLATION MANUAL



Prepare the required components (E x4).  
First, loosen the two screws at the bottom of E,  
then snap E into the rain channel as illustrated.

INSTALLATION MANUAL

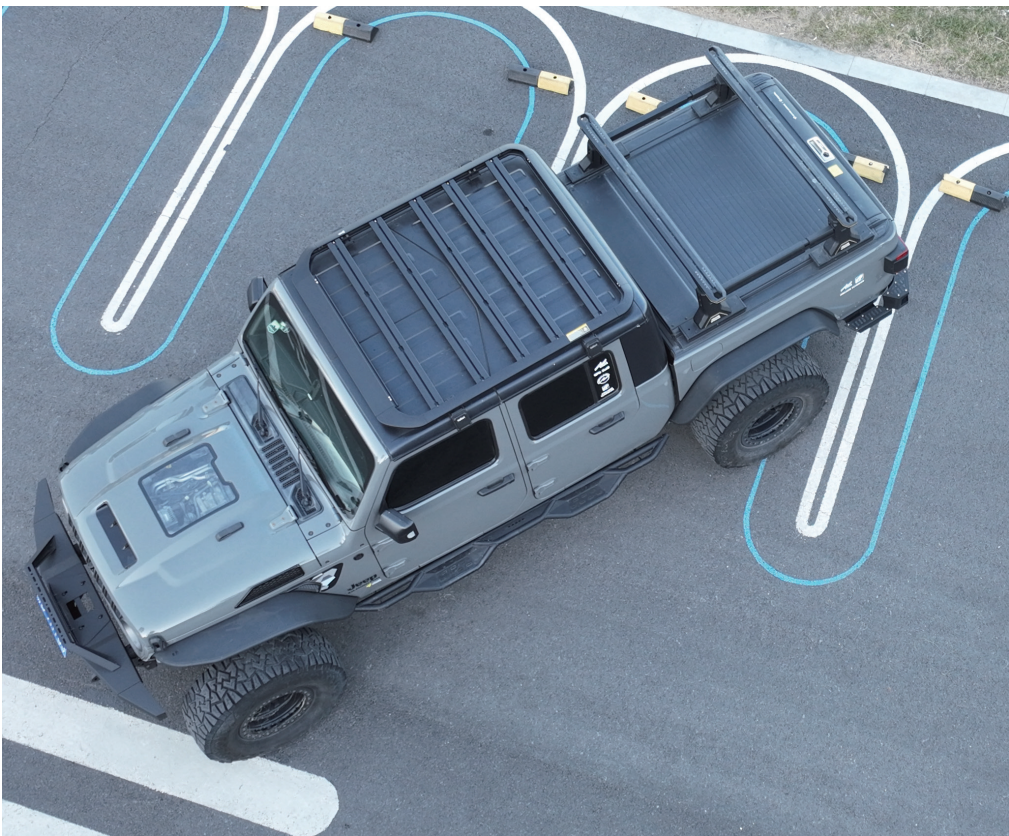

Installation completed.